



AstroJet 5000 Quick Start Guide






Step 1

Unpack Printer and Accessories

Place Printer on a stable surface.

Assemble: Adjustable Side Guide [1], Envelope/Media Side Guide [2], Rear Media Support [3], Rear Media Guide [4] and Exit Roller Guide Plate [5].

Save packaging material.

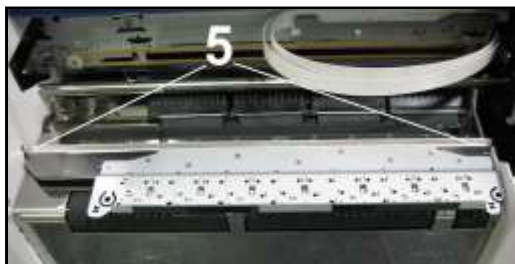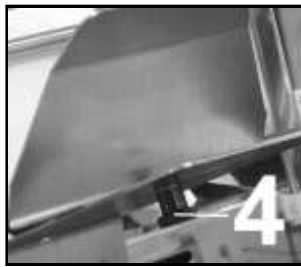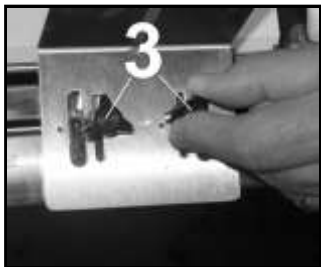


Step 2

Connect Power to Printer

1. Main power switch [3] is turned OFF.
2. Plug power cord from power adapter into receptacle [4] on rear of Printer.



Power Adapter

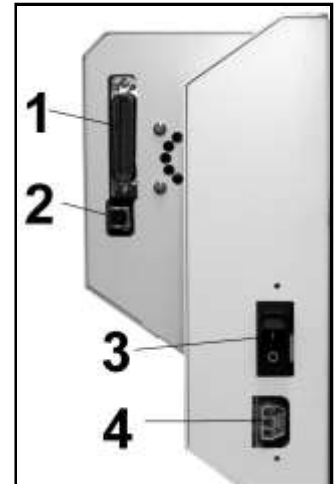

3. Plug AC power cord into power adapter. Plug other end of power cord into 115-220 Volt AC, 50/60 Hz grounded outlet.

Using a surge protector is recommended.



Connect Power Adapter to Printer


DO NOT POWER UP PRINTER YET

Step 3

Install Inkjet Cartridges

AJ-5000 uses two ink cartridges. (HP57 Color cartridge and HP56 or HP58 Black cartridge.) **HP56** Black cartridge is for everyday printing and **HP58** Black Cartridge is for photos and high quality printing.


1. Plug Printer in and turn main power switch ON. Open Top Cover and press soft power button [1]. Button lights up. Wait until mechanism stops moving. Open two printhead latching covers [2] (lift from front.)

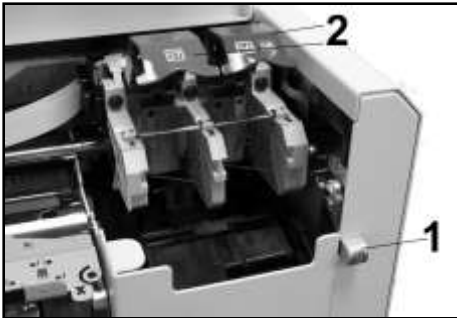

2. Insert cartridges in appropriate positions as shown. Color cartridge goes on left.



3. Press down on cartridge latches until they click, then close Latch Covers.

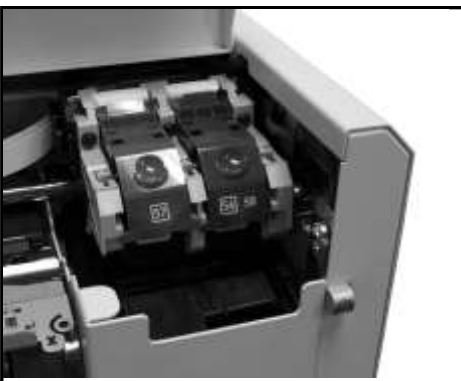

NOTE: Refer to **Section 3 – Operating the AstroJet 5000** for information on how to align printheads when installing new cartridges.




Step 4

Connect Printer to Computer

Printer has both USB [2] and Parallel Ports [1]. (Located one above the other as shown.)

USB Cable Users: Plug USB cable from computer into Printer's USB port.

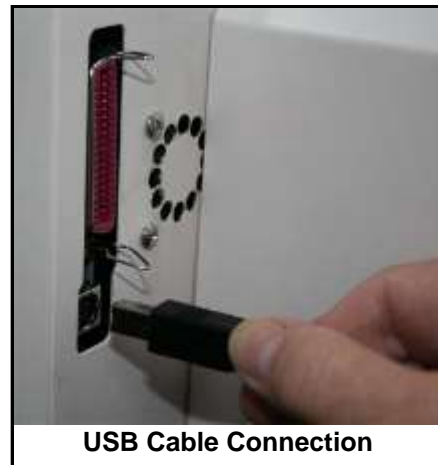

Parallel Cable Users: Plug Parallel Printer Cable from computer into Printer's Parallel Port. Latch two locking clips.



Step 5

Load “AJ5000 AMC50 Printer Driver Disk” into computer’s CD/DVD drive.

If “Drive Installation CD” launch window appears, you can ignore it.



DO NOT TURN PRINTER POWER ON YET

USB Port Installation

1. With Printer connected to computer via USB port, turn Printer **ON**. “Welcome to the Found New Hardware Wizard” opens. Check box “No, not this time” as shown. Click **Next>**.



2. Next window displays name of Printer: AMC50 or AMCAMC50. Click “Install the software automatically (Recommended)” box. Click **Next>**.



3. Window shown below appears, then “Hardware Installation” window appears. Click **Continue Anyway** to load driver software from CD.



4. Once driver is loaded, “Completing the found New Hardware Wizard” window opens. Click **Finish**.
5. Installation is complete when “Found New Hardware” box appears in lower right-hand corner of screen.

Parallel Port Installation

1. With Printer connected to computer via Parallel Port (LPT1), turn Printer **ON**. If “Welcome to the Found New Hardware Wizard” opens, **CLOSE** it.
2. Click on **START** and then **Printers and Faxes**. When “Printers and Faxes” window opens click on “Add a printer”.



3. “Welcome to the Add Printer Wizard” window. Click **Next>**.



4. “Local or Network Printer” window. Click “Local printer attached to the computer” and “Automatically detect and install my Plug and Play printer” buttons. Click **Next>**.



5. “Welcome to the Found New Hardware Wizard”. Click on “No, not at this time”. Click **Next>**.



6. When “Found New Hardware Wizard” appears, click “Install the software automatically (Recommended)” button. Click **Next>**.



7. Installer looks for CD (*may take a few minutes.*) “Please wait while the wizard installs the software...” and “Copying Files” windows open.



8. “Hardware Installation”. Click **Continue Anyway** button to continue software installation.



9. **“Completing the Found New Hardware Wizard”**. Click **Finish**.



10. **“New Printer Detection”**.
(You can choose to print a test page).
Click **Next>**.



11. **“Completing the Add Printer Wizard”** displays information about Printer.
Click **Finish** to close window.



12. Restart computer to complete installation.

Step 6

To install Accessories and/or for Printer set-up or operation, please refer to **“AstroJet 5000 Shuttle Printer Operator Manual”** supplied with Printer.



630 Lively Blvd.
Elk Grove Village, IL 60007
Phone: (847) 364-6363
Fax: (847) 364 9898
www.astromachine.com